26-61532, 26-71532

Kenmore Laundry Center

○ Electric White 26-61532 ○ Gas White 26-71532

- 27 inches wide
- 3.2 cu. ft. capacity washer, 1-speed motor
- 11 wash cycles
- Agitator cleaning system
- Dispensers for fabric softener and bleach
- 5.9 cu. ft. dryer
- 9 drying cycles, 5 temperatures
- Auto dry
- Wash and dry at the same time

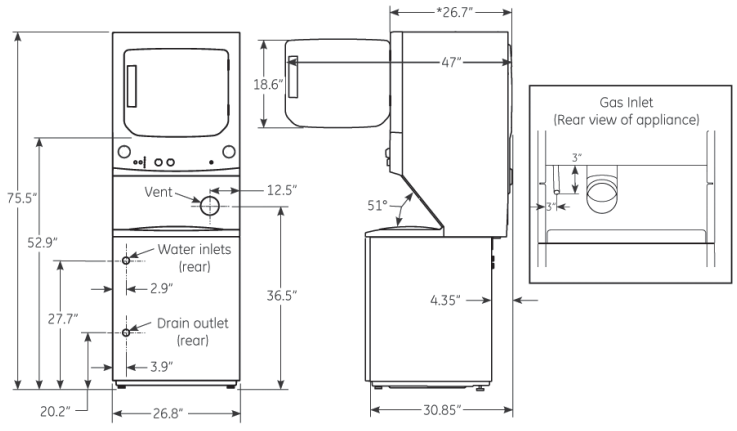

*Dimension represents door closed including handle and knobs.
NOTE: With feet set at mid position, feet can be adjusted +/-.375 in.

SELECTION	KENMORE
Washer and Electric Dryer: White	26-61532
Washer and Gas Dryer: White	26-71532
WASHER FEATURES	
Basket Volume (Cu. Ft.)	3.2
Number of Speeds	1
Cycle Selections:	11
Normal	•
Casual / Permanent Press	•
Delicate	•
Quick Rinse	•
Rinse / Spin	•
Spin Only	•
Wash / Rinse Temperatures	5
Water Level Selections	5
Soil Level Selections	4
Agitator	•
Bleach Dispenser	•
Fabric Softener Dispenser	•
Basket Construction	Plastic
Leveling Legs	•
Motor H.P.	1/4
Sound Insulation	Quiet-By-Design™
DRYER FEATURES	
Capacity (Cu. Ft.)	5.9
Cycle Selections:	9
Normal	•
Casual / Permanent Press	•
Delicate	•
Wrinkle Rid	•
Timed Dry	•
Quick Fluff	•
Air Dry	•
Cool Down	•
Temperature Selections	5
Auto Dry	•
Push / Turn-To-Start Button	•
Internal / Up-Front Lint Filter	•
Motor H.P.	1/4
Venting	3-Way (Bottom, Right, Left)
GENERAL FEATURES	
Front Serviceable	•
Power Cord Included	Gas Only
Washer, Electric Dryer: Volts / Hz / Amps	240 / 60 / 22–24
Watts (Dryer Heater)	4,500
Electric Dryer Circuit Required (60Hz.)	30 Amp
Washer, Gas Dryer: Volts / Hz / Amps	120 / 60 / 11
BTU Per Hour	18,000
LP Gas Conversion Kit	WE25M74
Est. Yearly Energy Consumption	289 kWh / yr.
Est. Yearly Operating Cost†† Gas Water Htr / Elec. Water Htr	$19 / $31
Item Weight (Approx. Lbs.)	247
Shipping Weight (Approx. Lbs.)	278
WARRANTY	
1 Year Limited Warranty – Entire Appliance	Parts & Labor

If used for other than private family purposes, warranty applies for only 90 days.
Htr = Heater ††All energy $ / Yr. figures are calculated at the national average cost of $0.1065 / kWh and $1.218 per therm. Energy rebates are offered and paid by the energy supplier in states where such programs exist. Criterion is based on percentage of energy efficiency attained beyond the 2007 standard. Dollar amounts may differ.

Sears Commercial

Due to Sears policy of continuous improvement on its products, Sears reserves the right to change materials and specifications without notice. Before installing, consult installation instructions packed with product. For complete warranty information, consult the owner's manual or visit www.managemylife.com.

sears

DRYER VENTING RECOMMENDATIONS

Clamps are recommended for wall and dryer connections. Steel clamps designed to resist stretching, with phillips / hex head screw are included one each on elbows and periscopes.



26-98379 — Vent Hood
Aluminum body and plastic molded hood with a 4" opening.

IMPORTANT NOTE:

Do not use non-metal flexible duct. Also, when installing the venting system, do not exceed the specified length for the vent duct. Venting systems which are longer than specified will accumulate lint, increase drying time and energy use and shorten the life of the dryer.

DRYER EXHAUST LENGTH

RECOMMENDED MAXIMUM LENGTH		
Exhaust Hood Types		
	Recommended	Use only for short run installations
		
No. of 90° Elbows	Rigid Metal	Rigid Metal
0	56 Feet	42 Feet
1	44 Feet	32 Feet
2	34 Feet	25 Feet
3	24 Feet	18 Feet

POWER CORDS FOR ELECTRIC DRYERS ONLY

26-49387, 26-49787



All Electric Dryers Require Cord

Order	Wire	Length
26-49387	3	4 ft.
26-49787	3	6 ft.
26-49388*	4	4 ft.
26-49788*	4	6 ft.

26-49388, 26-49788



*Complies with 1/1/96 NEC code revision for new construction and remodeling

4" Clearance Behind the Dryer is Preferred for Best Airflow.
2" Clearance is Achieved With Periscopes.

4" CLEARANCE BEHIND DRYER

26-49900 — Over-The-Top™ Kit
Universal solution, 8 foot length. Kit includes two 4 ft. pipe sections with attached elbows, two close elbows, clamps and wall plate.



26-49608 — Flexible Pipe
4" x 6' with snap-lock fittings, 90˚ turn takes 1 foot length and 6 inch clearance



26-49609 — Close Elbow
Turns 90˚ within 4", rotating collars and snap-lock fittings

2" CLEARANCE BEHIND DRYER

26-49901 — Periscope 0-5"

26-49908 — Periscope 0-18"
For outlets that overlap or are very close

26-49904 — Periscope 18-29"
Reaches side of most dryers

26-49905 — Periscope 29-50"
Reaches top of most dryers



Gas Dryer Connector – Stainless Steel	
26-49590	1/2" - 3/8" Flex, 5 ft.
26-49585*	3/8" - 3/8" Flex, 5 ft.

*Los Angeles only